


FALCON[®]

Tailpiece Installation for F, H, N, S, X and LY Locks

For proper lock function, the tailpiece must be installed correctly.

All F, H, N, S, X lock tailpieces are installed HORIZONTALLY.

All LY lock tailpieces are installed VERTICALLY.

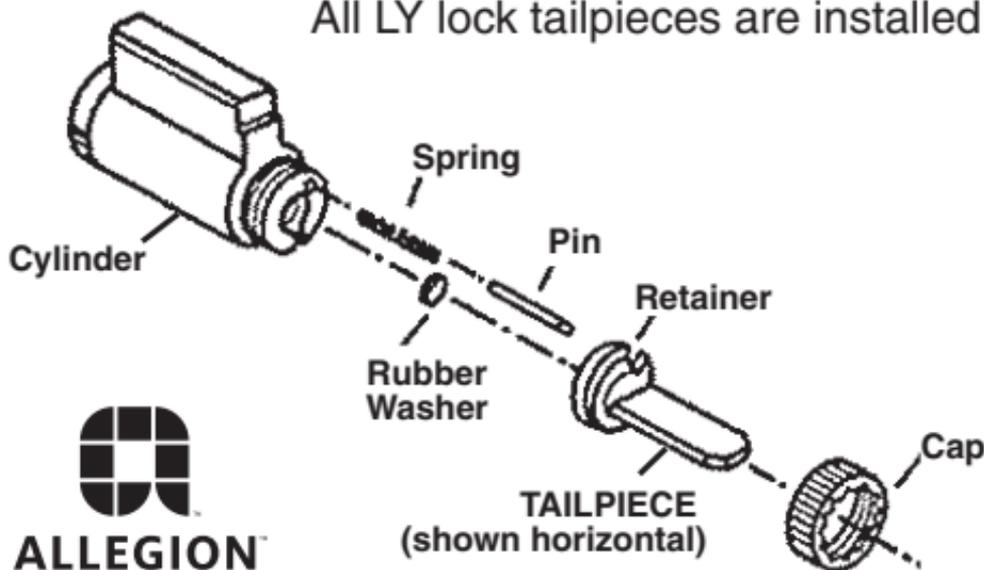

© Allegion 2014
Printed in U.S.A.
030260-000-70 Rev. 10/14-d



4.000



2.500

Additional Notes:
1. None

Revision History						Revision Description:				
A	B	C	D	E	F	D > Revised artwork				
5533	0790	6683								
Material						Edited By	Approved By	EC Number	Release Date	
50# Offset or Equivalent						J. Ellis	M. Roberts	xxxxx	10/14	
Notes						Title				
1. printed one side						F, H, N, S, X, LY Lock Tailpiece Installation				
2. printed black						Creation Date	Number		Revision	
3. tolerance ± .13						10-29-14	030260-000-70		D	
4. printed in country may vary						Created By	Activity			
						J. Ellis	3899 Hancock Expwy Security, CO 80911			
						Software: InDesign CS6			© Allegion 2014	