



941908-00

Lock Stile Cover Plate


997

VON DUPRIN®

Installation Instructions

1. PREPARE INSIDE FACE OF LOCK STILE FOR DEVICE AND COVER PLATE.
  - A. SEE DEVICE DIRECTION FOR CORRECT BACKSET AND LOCATION OF LINE X-X.
  - B. LOCATE AND PREPARE ALL HOLES AS INDICATED.
2. APPLY COVER PLATE.
3. APPLY DEVICE.

#10-24 TAP FOR METAL DOORS.  
 #10 W.S. FOR WOOD DOORS.  
 SIZE OF PILOT HOLES FOR WOOD DOORS DEPENDS ON HARDNESS OF WOOD.  
 2 HOLES

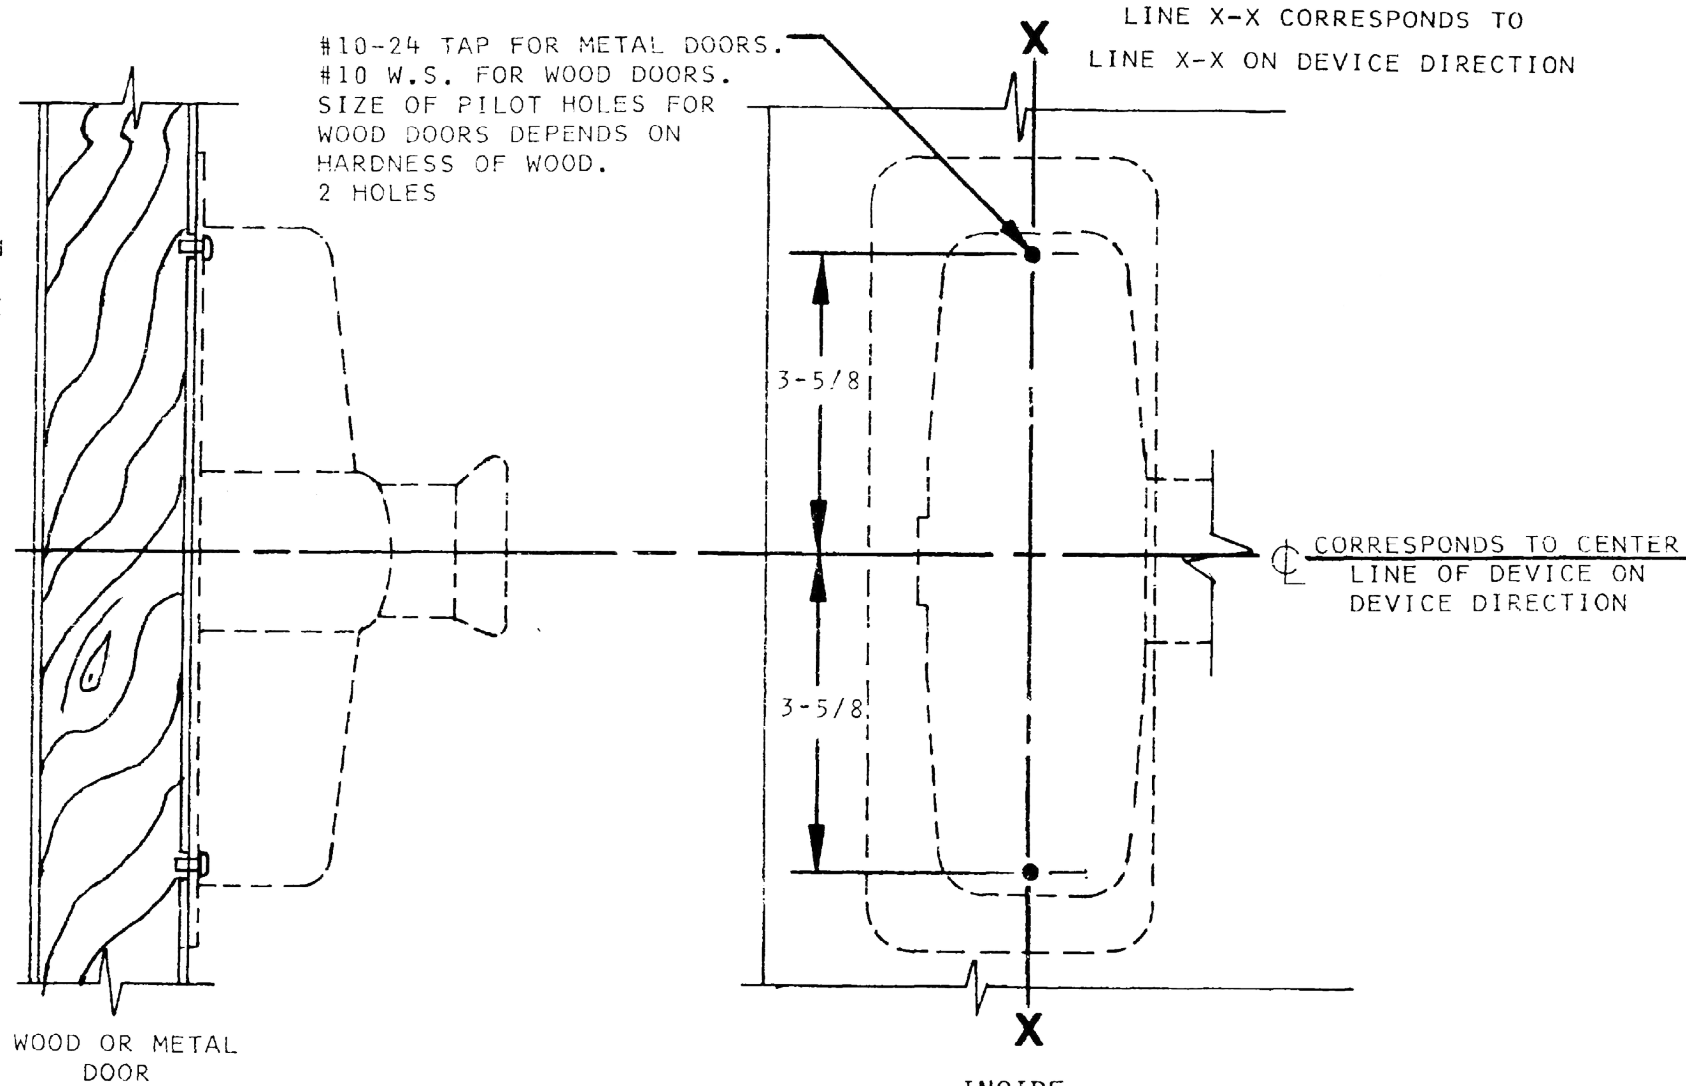

WOOD OR METAL DOOR

LHR SHOWN  
RHR OPPOSITE

INSIDE  
FACE OF  
LOCK STILE

**Customer Service**  
 1-877-671-7011    www.allegion.com/us



© Allegion 2014  
 Printed in U.S.A.  
 941908-00 Rev. 01/14-b

1. PREPARE INSIDE FACE OF HINGE STILE FOR DEVICE & COVER PLATE.
  - A. LOCATE CENTERLINE OF DEVICE HINGE STILE MOUNTING.
  - B. LOCATE & PREPARE ALL HOLES AS INDICATED.
2. PREPARE OUTSIDE FACE OF HINGE STILE FOR COVER PLATE.
  - A. TRANSFER CENTERLINE OF DEVICE HINGE STILE MOUNTING FROM INSIDE FACE TO OUTSIDE FACE OF DOOR. BE SURE CENTERLINE IS PARALLEL TO EDGE OF DOOR.
  - B. LOCATE AND PREPARE ALL HOLES AS INDICATED.
3. APPLY INSIDE AND OUTSIDE COVER PLATES.
4. APPLY DEVICE.

