



VON DUPRIN®

Advanced offline solutions for exit devices with the remote undocking (RU) and remote monitoring (RM) option

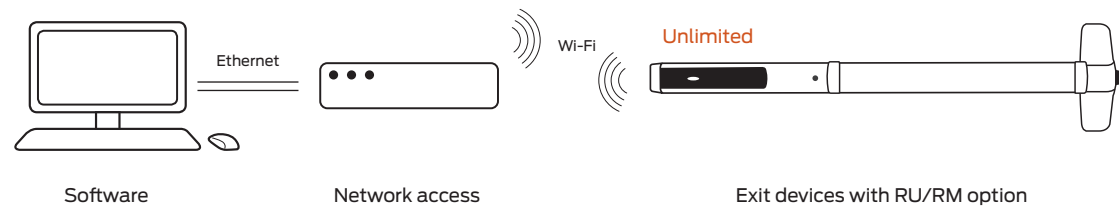

VON DUPRIN®

Gateway (RS-485) integration for exit devices with the remote undocking (RU) and remote monitoring (RM) option

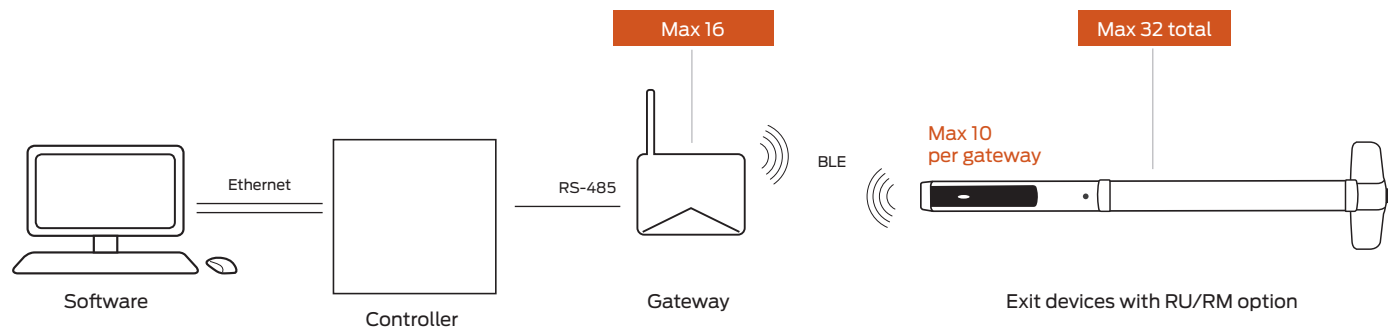


Although not specifically addressed on this document, AD Series locks are also supported. See separate AD Series integration for details.

Gateway communication range up to 30' in typical building environments; a detailed site survey is recommended.

VON DUPRIN®

Gateway (RS-485) integration for exit devices with the remote undocking (RU) and remote monitoring (RM) option

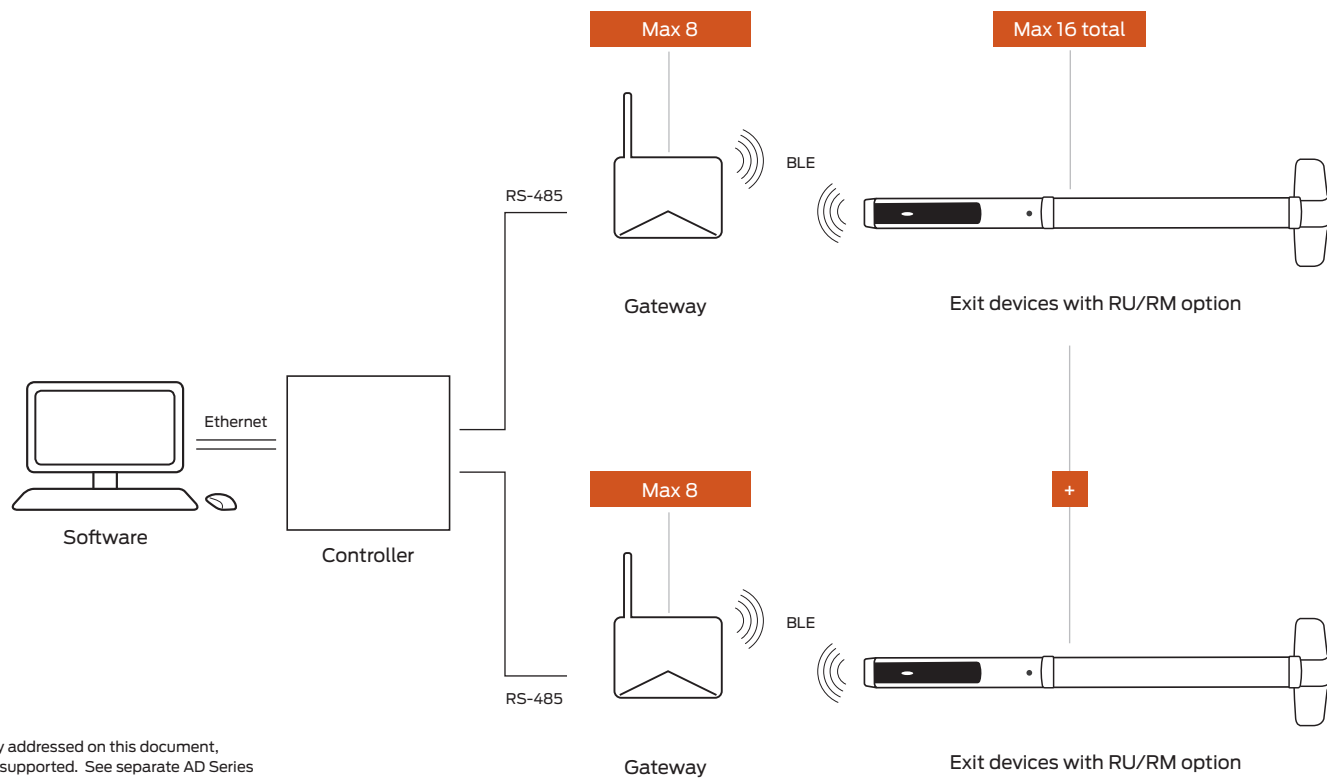

Although not specifically addressed on this document, AD Series locks are also supported. See separate AD Series integration for details.

Gateway communication range up to 30' in typical building environments; a detailed site survey is recommended.