


VON DUPRIN®

Gateway (RS-485) integration for exit devices with the remote undocking (RU) and remote monitoring (RM) option

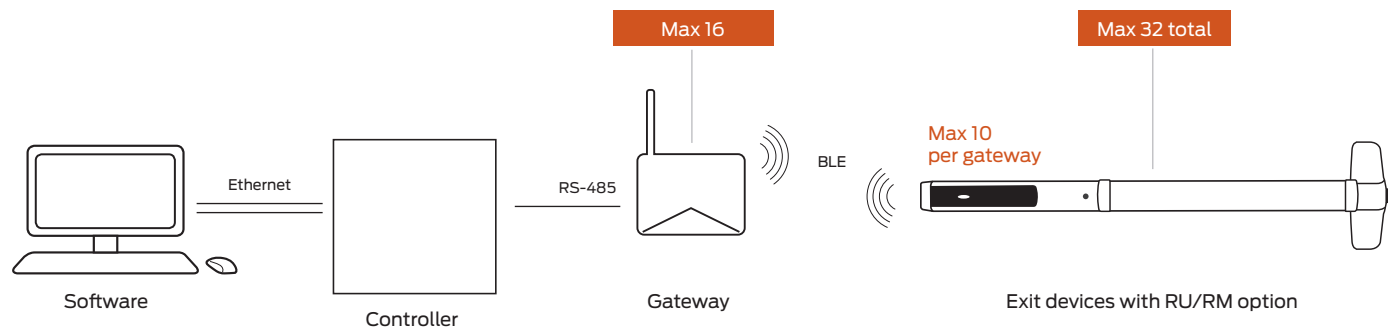

Although not specifically addressed on this document, AD Series locks are also supported. See separate AD Series integration for details.

Gateway communication range up to 30' in typical building environments; a detailed site survey is recommended.