




RS-485 integration for AD-400 and AD-401 wireless devices

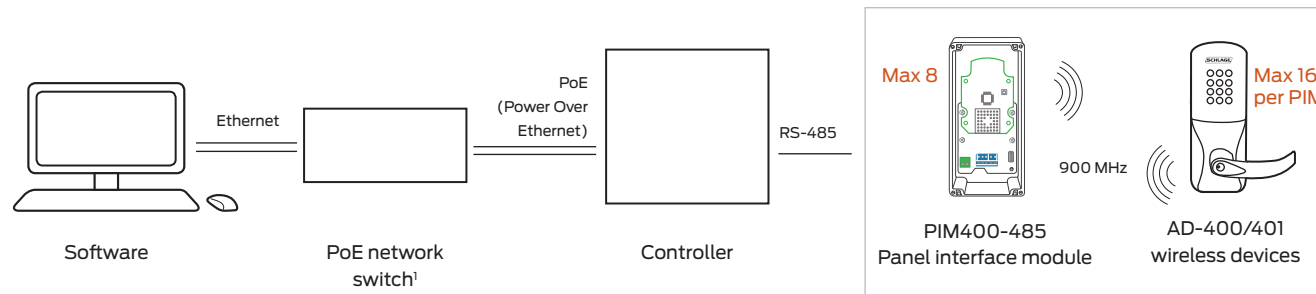

¹ In order to have a UL Listed configuration a UL294 12VDC power supply must be used instead of PoE.

Wireless range up to 200' in typical building construction, up to 1000' line of sight